



**CE PT1 Series**

**ISO 9001**  
Certified

- Accuracy 0.25%, 0.5%
- Throttle Screw in Fitting
- Temperature Compensated
- Built in Amplifier
- Shock and Vibration Resistance
- Zero and Span Adjustments
- False System Shutdown Prevention

HAWK PT1 series ceramic cell pressure transmitters and transducers have been designed for most industrial pressure measurement applications when considering the quality performance, reliability and cost.

The ceramic cell and metallic wetted parts can be compatible with majority of aggressive process fluids. The output signal of the sensing bridge is converted to be a standardized current or voltage signal through surface mount technology circuit board. This high level signal output with very low noise system is packaged in a rugged stainless steel housing to resist the harsh and extreme environment conditions. Each transmitter is inspected and calibrated to ensure its 100% quality.

## Typical Applications

- Industrial Engineering
- Hydraulic monitoring systems
- Industrial engines
- Pneumatic system measurements
- Vehicle brake system monitoring
- Energy and water managements

- Process control
- Plant quality control equipment
- Laboratory testing equipment
- Construction and agriculture equipments

## Specifications

### PERFORMANCE

**Accuracy at 25 C°(Linearity, Hysteresis, Repeatability):**

< ±0.25% F.S.....PT13

< ±0.5% F.S.....PT14

**Stability at 25 C°:**

< ±0.2% F.S.(PT13), < ±0.4% F.S.(PT14)

**Thermal Zero Shift:**

< ±0.02% F.S./ C°.....PT13

< ±0.04% F.S./ C°.....PT14

**Thermal Span Shift:**

< ±0.03% F.S./ C°

### ENVIRONMENTAL

**Operating Temperature Range:**

-25.....85 C°

**Storage Temperature Range:**

-25.....100 C°

**Compensated Range:**

-40.....135 C°

**Weatherproof Rating(Enclosure):**

IP65, NEMA4/4X or better

### PHYSICAL DATA

**Housing(Case):**

304 Stainless Steel(316SS Option)

**Fitting Materials:**

304SS, 316SS, Monel or Hast'C

**Ceramic Sensor:**

Aluminum Oxide Al<sub>2</sub>O<sub>3</sub> (96%)

**Seal Material:**

FPM(Viton), NBR, Silicone Rubber, CR(Neoprene), EPDM(Ethylene Propylene)

**Note:** The wetted parts including fitting, ceramic sensor and sealing will be contacted with the media directly, please choose the appropriate material complied to your application.

**Process Fitting(Connection):**

1/2"NPT, 1/4"NPT, G1/2, G1/4, R1/2, R1/4, 7/16-20UNF, M20\*1.5, M14\*1.0, 9/16-18UNF, Others on request

**Electrical Connector:**

Terminal Box to DIN43650 A-PG9(IP 65)  
Shutter Type Cable(IP 65)  
Flexible Cable(IP 65)  
Terminal Box to DIN43650 A-G ½(IP 65)  
M12 Cable(IP 65)

### ELECTRICAL DATA Voltage Output

**Output Signal(Voltage, 3 Wires):**

0-10V, 0-5V, 0.5-4.5V, 1-5V, 1-6V

**Power Requirement(Voltage):**

15-32VDC(Normal 24VDC, Voltage)

**Load Resistance(Voltage):**

>10K Ohms

### Current Output

**Output Signal(Current, 2 Wires):**

4-20 mA

**Power Requirement(Current):**

10-32VDC(Normal 24VDC, Current)

**Load Resistance(Current):**

≤ Supply Voltage -10V)/(0.02A)0hms

## Electrical Compatibility


### CE-Conformity

Interference emission per EN50081-1 and EN50081-2


Interference immunity per EN50082-2

## Dimensions(mm)


DIN 43650 A




DIN 1/2" Female





Shutter Cable



M12 Conduit




Flexible Cable




PT1

Code E




1/7" PF

Code H




3/8" PF

Code D




1/2" PF

Code B




1/4" PT

Code 4



1/4" NPT

Code 2



1/2" NPT

**Note:** If you need the other process connections not listed, please contact with our distributors.

### Media Compatibility and applications

Media compatibility must be considered when purchasing a pressure transducers and transmitters, Improper selection and application of the pressure transmitters and transducers could possible cause sensor failure and lead to possible damage or personal injury. The media to which the pressure sensors are going to be in contact with, must have compatibility with the  $Al_2O_3$ . In particular the data of weight loss found after a dipping pf 80 hours at room temperature in some media have shown a good resistance to Hcl (at 30% wt) and  $HNO_3$ (at 60% wt). Therefore the ceramic cell has a very good chemical resistance.

But the alumina is instead easily etched by even 1% solution of Fluorine acid(HF). For such applications, you can use the HAWK ceramic pressure sensor combined diaphragm seal or the other HAWK Pressure sensors such as stainless steel thin film sensor or diaphragm micro-machined silicon sensor instead. The wetted parts of the transmitter including pressure fitting, ceramic cell and sealing will contact with the media directly. Selecting the suitable pressure fitting material and sealing material is very important.

Please refer to HAWK Corrosion table for detailed information.

### Sealing Materials vs Common Applications

Sealing Materials  1=Recommended, 2=Satisfactory, 3=Poor, 4=Marginal, 5=Not Recommended A=Available N/N=Not Available	Common Application Conditions																
	Gasoline, Naphtha	Benzene, Toluene	Aliphatic Hydrocarbon	Alcohol	Ester	Ketones (MEK)	Ethyl Acetate	Water	Organic Acid	Animal/Vegetable Oil	Aromatic Solvent	Oxidized Solvent	High Consistency Alkali	Low Consistency Alkali	High Consistency Inorganic Acid	Low Consistency Organic Acid	
	Buna N(Nitile), NBR	1	3	5	1	4	4	4	1	4	1	3	5	2	2	4	2
	Fluorocarbon(Viton), FPM	1	1	2	1	4	2	5	1	5	1	1	5	5	4	1	1
	Ethylene-Propylene(EPDM), P.C	5	3	5	1	2	1	1	1	5	2	5	1	1	1	2	1
	Fluorosilicone, VMQ	4	4	3	1	4	2	3	2	2	3	5	4	1	1	4	2
	Neoprene, CR	2	5	5	1	4	3	5	1	4	2	4	5	1	1	2	1

The materials and applications listed are the most commonly used. There are a lot of compound variations designed for specific applications. For demanding applications, please supply all detailed to our application engineers for a recommendation or go to [www.efunda.com](http://www.efunda.com) for detailed information.

Sealing Materials	Common Application Conditions																		
	High Temp Limit C°	Low Temp Limit C°	Steam< 250 (C°)	Steam< 120 (C°)	Permeation/Vacuum	Fluorescent/Sunlight	Weathering/Ozone	Refrigerant/Freon(most)	Wear/Abrasion	Compression Set	Brake Fluids	Transmission Fluids	Steering Fluids	Fuels/Gasline(most)	Chemicals/Solvents(most)	Petroleum Oils(most)	Dynamic Applications	FDA Compliant	NFS61(Drinking Water)
1=Recommended, 2=Satisfactory, 3=Poor, 4=Marginal, 5=Not Recommended A=Available N/N=Not Available																			
Buna N(Nitile), NBR	120	-40	5	4	2	4	4	4	2	2	5	2	5	3	4	3	2	A	A
Fluorocarbon(Viton), FPM	200	-15	4	3	1	1	1	3	2	1	4	3	2	2	2	1	1	A	N/A
Ethylene-Propylene(EPDM), P.C	150	-55	4	1	2	1	1	5	2	2	1	3	5	5	2	5	1	A	A
Fluorosilicone, VMQ	180	-60	5	5	4	1	1	1	4	3	3	3	2	1	3	3	3	N/A	N/A
Neoprene, CR	120	-35	5	5	2	2	2	2	2	3	5	3	3	5	5	2	1	N/A	N/A

### Pressure Range

#### Scale:psi

Code	P25	P28	P31	P32	P33	P35	P38	P39	P41	P42	P43	P44	P45	P46	P48	P49	P50	P50A	P51	P52
Range	3	5	10	15	20	30	50	60	100	150	160	200	250	300	400	500	600	750	800	1000
Overload	6	10	20	30	40	60	100	120	200	300	320	400	500	600	800	1000	1200	1500	1600	2000

Code	P53	P54	P56	P58	P59	P60	P60A	P62	Pv1	PCA	PCB	PCC	PCD	PCE	PCF	PCG	PCH	PCJ	PCK
Range	1500	2000	3000	4000	5000	6000	7500	10000	VAC	VAC/15	VAC/30	VAC/60	VAC/100	VAC/150	VAC/160	VAC/200	VAC/300	VAC/500	VAC/600
Overload	3000	4000	6000	8000	10000	12000	10000	12000	15	30	60	120	200	300	320	400	600	1000	1200

#### Scale:bar

Code	R06	R07	R08	R1	R09	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
Range	0.2	0.25	0.3	0.4	0.5	0.6	1	1.6	2	2.5	3	3.5	4	5	6	7	10	16	20
Overload	0.8	1	1.2	0.8	1	1.2	2	3.2	4	5	6	7	8	10	12	14	20	32	40

Code	R16	R17	R18	R19	R20	R21	R22	R23	R24	R25	R26	R27	R28	R29	R30	R31	R32	RV1	RCA	RCB
Range	25	30	35	40	50	60	70	100	160	200	250	300	350	400	500	600	700	-1/0	-1/0.6	-1/1
Overload	50	60	70	80	100	120	140	200	320	400	500	600	700	800	1000	1200	1400	1	1.2	2

Code	RCC	RCD	RCE	RCF	RCG	RCH	RCI	RCK	RCP	RCR	RCT	RCW	RCX
Range	-1/1.5	-1/2	-1/2.5	-1/3	-1/4	-1/5	-1/6	-1/9	-1/15	-1/19	-1/24	-1/30	-1/40
Overload	3	4	5	6	7	10	12	18	30	38	48	60	80

#### Scale:kg/cm<sup>2</sup>

Code	G06	G07	G08	G1	G09	G2	G3	G4	G5	G6	G7	G8	G9	G10	G11	G12	G13	G14	G15	G16
Range	0.2	0.25	0.3	0.4	0.5	0.6	1	1.6	2	2.5	3	3.5	4	5	6	7	10	16	20	25
Overload	0.4	0.5	0.6	0.8	1.0	1.2	2	3.2	4	5	6	7	8	10	12	14	20	32	40	50

Code	G17	G18	G19	G20	G21	G22	G23	G24	G25	G26	G27	G28	G29	G30	G31	G32	GV1	GCA	GCB	GCC
Range	30	35	40	50	60	70	100	160	200	250	300	350	400	500	600	700	-1/0	-1/0.6	-1/1	-1/1.5
Overload	60	70	80	100	120	140	200	320	400	500	600	700	800	1000	1200	1400	1	1.2	2	3

Code	GCD	GCE	GCF	GCG	GCH	GCI	GCK	GCP	GCR	GCT	GCW	GCX
Range	-1/2	-1/2.5	-1/3	-1/4	-1/5	-1/6	-1/9	-1/15	-1/19	-1/24	-1/30	-1/40
Overload	4	5	6	8	10	12	18	30	38	48	60	80

Note: If you need the other ranges not listed, please contact with our distributors.

### Electrical Connection



DIN 43650 A



DIN 1/2" Female



Gland Cable



Flexible Cable




M12 Conduit


Note: If you need the other electrical connections not listed, please contact with our distributors.

### Wiring

#### DIN Connection

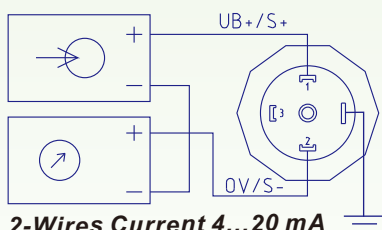


**2-Wires Current 4...20 mA**

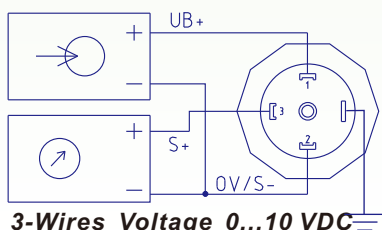


**3-Wires Voltage 0...10 VDC**

#### Cable Connection



RED-SEE TABLE  
WHITE-SEE TABLE BLACK-SEE TABLE

Output	Red	Black	White	Green
Voltage	+ V Supply	- V Supply	Output	Grounding
Current	+ V Supply	- V Supply	NC	Grounding

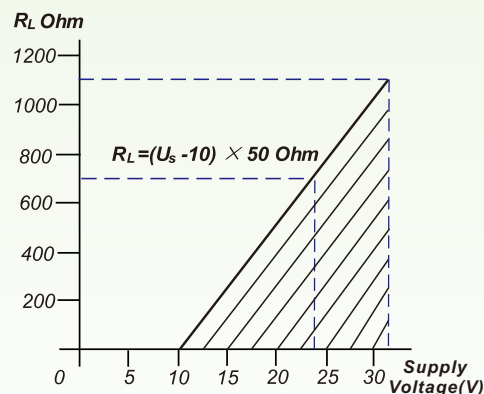

The diagram shows the optimum ratio between the load and supply voltage of the 4-20mA transmitter.

For a correct use, any combination of load resistance and supply voltage, choose the slant line area.

### Order Information

#### P-2A-PT1



Accuracy	Reference	Wetted Parts	Process Connection	Electrical Connection	Cable Length	Output Signal	Pressure Range	Seal Material
<b>3</b>	<b>R</b>	<b>S</b>	<b>2</b>	<b>A</b>	<b>0</b>	<b>F</b>	<b>K3</b>	<b>V</b>
3-0.25% 4-0.5%	R-Relative A-Absolute	S-316SS M-Monel H-Hast'C B-Brass A-304SS L-Others	2-1/2"NPT 3-3/8"NPT 4-1/4"NPT D-G1/2 H-G3/8 E-G1/4 G-R3/8 B-R1/4 J-M20*1.5 K-M14*1.0 9-9/16"-18UNF 7-7/16"-20UNF L-Others	A-DIN 43650 D-1/2" Female DIN F-Gland Cable P-Flexible Cable M-M12 Cable L-Others	0-No Wire 025-2.5" 900-900" 1M-1m 200M-200m 40MM-40mm 300MM-300mm 10F-10 Feet 106F-106 Feet L-Others	A-0...10 VDC B-0...5 VDC C-1...5 VDC D-0.5...4.5 VDC E-1...6 VDC F-4...20 mA L-Others	Please refer to the range table and write down the code you need.  Vacuum Compound Pressure	B-NBR (Buna Rubber) V-FPM(Viton) S-MVQ(Silicone Polymer) N-CR(Neoprene) E-EPDM (EthylenePropylene) K-FFKM L-Others



#### H-Option

### Option

X- Cleaned for oxygen service(Use No Oil)  
C- Certification of calibration  
I- TAF Certification of calibration

N- NACE Treatment  
H- Ultra High Purity

U- U Clamp Kit  
Y- SS Tag Plate



## Accessories




Diaphragm seal is used to isolate pressure measuring element from the harsh media such as contains suspended solid, highly viscous, high temperature media and so on. Remote diaphragm seal is supplied for the process temperature over 180 °C.

Pulsation dampener is designed to reduce the effect of pressure fluctuation and sudden pressure changes.

Digital indicating can be used with the transmitter for your system. It is ideal for all industrial applications when a local pressure reading and a remote signal transmission to a programmable logic controller or other



Needle valve is a device to shut-off your media system entering the transmitter

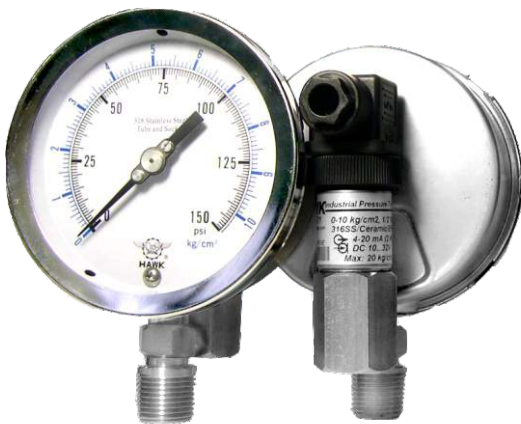




The analog indicating pressure transmitter is developed by using a bourdon tube pressure gauge and a ceramic cell pressure transmitters. It is ideal for all industrial applications when a local pressure reading and a remote signal transmission to a programmable logic controller or other computer-based system are required. The pressure gauge can continue to monitor your system even if an electrical power cut.

The over-pressure protectors are designed to protect the pressure instrument against short pressure peaks which may exceed the max operating pressure range.






## Accessories



### PT1-2D

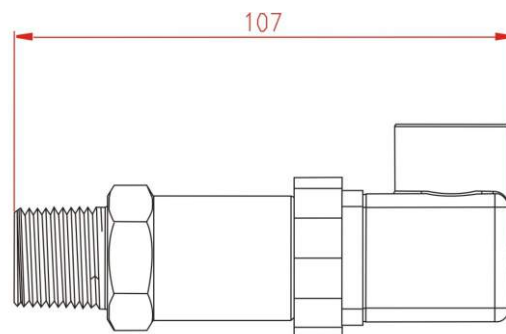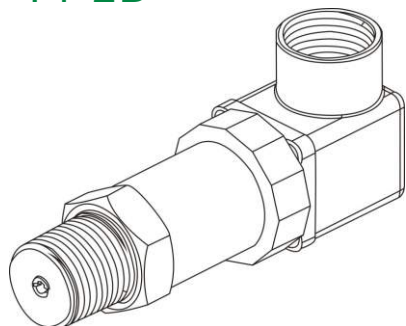




### PT1-BA

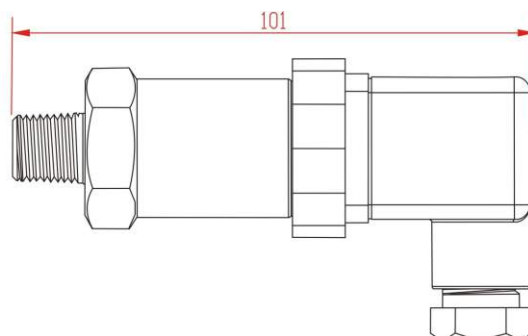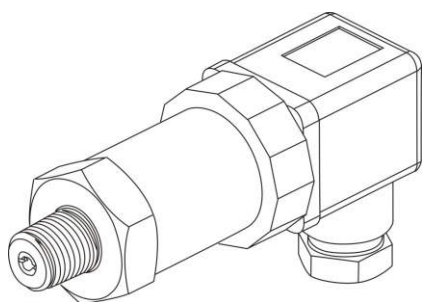

### PT1-22

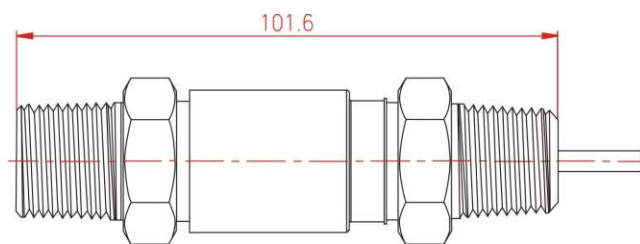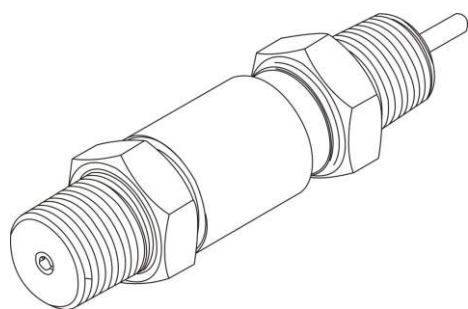

### PT1-2P

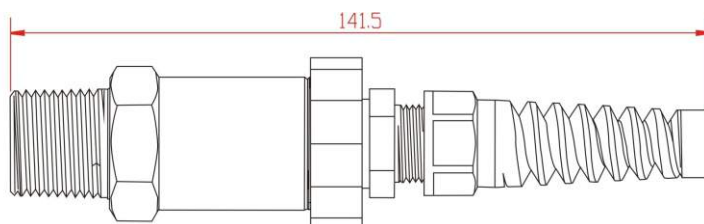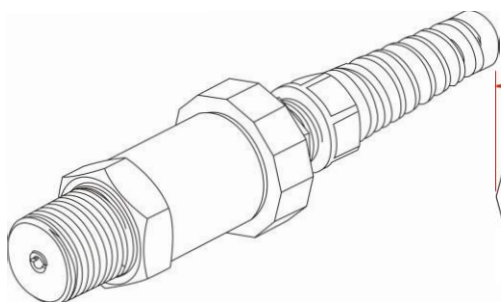

## Limited Warranty and Liability

HAWK GAUGE CO.,LTD warrants all its electrical instruments to be free from defects in materials and workmanship. HAWK Agrees to repair or replace any pressure transmitter or transducer if returned to our factory, transportation charges prepaid, and after which examination reveals is to be defective due to faculty workmanship or material. This warrant should not apply to subject to the following terms and conditions:

- A). The product has not been subjected to misuse, neglect, abuse , accident, incorrect wiring, improper use or misapplication such as negligence, accident, vandalism, shock or vibration.
- B). The performance of any system of which HAWK's products are a component part.
- C). The product has not been exposed to any other service, range or environment of greater severity than that for which the products were designed.
- D). The product has not been altered or repaired by anyone except HAWK GAUGE or its authorized service agencies.
- E). The serial number or date code has not been removed, defaced or changed.

Unless otherwise specified in a manual or warranty card, or agree to in a writing signed by HAWK GAUGE office, HAWK Pressure products shall be warranted for one year from the date of sale.

This warranty is in lieu of all other warranties expressed or implied, and of all obligations or liabilities on its part for damages including but not limited to consequential damages, following the use of misuse of instruments sold by it. No agent is authorized to assume for it any liability except as set forth above.

## Note

HAWK GAUGE CO.,LTD reserves the right to make product improvements and change its specifications at any time stated throughout this brochure without notification. Please contact the factory on all critical dimensions and specifications for verification. HAWK GAUGE is not expert in the customer's technical field and therefore doesn't warrant suitability of it's product for the application selected by customer.

