

56 Series

Regulators - Pressure Reducing

D56XX2099X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

15,000 psig / 1034 bar

Maximum Outlet Pressure

200-15,000 psig / 13.8-1034 bar
(non-adjustable spring bias pressure: 175-200 psig / 12-13.8 bar)

Design Proof Pressure

150% maximum rated

Leakage

Bubble-tight

Operating Temperature

-15°F to 165°F / -26°C to 74°C

Flow Capacity

See table

MEDIA CONTACT MATERIALS

Body

316 Stainless Steel, Nitronic 60

Seat, Main Valve

VespeI® SP1. 17-4 Stainless Steel

O-Ring

Kalrez®

Back-up Ring

CTFE, Teflon®

Remaining Parts

300 Series Stainless Steel, 17-4 Stainless Steel and Nitronic 60

OTHER

Cleaning

CGA 4.1 and ASTM G93

Weight (approximate)

56-21XX: 18.26 lbs / 8.28 kg

56-22XX: 9.09 lbs / 4.12 kg

Teflon®, VespeI® and Kalrez® are registered trademarks of E.I. du Pont de Nemours and Company.

Features and Benefits

- Accurate and consistent flow control reduces the risk of flow assurance issues from over and under injection
- High-quality piston-sensed components for longevity in offshore applications reduce maintenance costs and unplanned downtime
- Alternative options for full automation of injection rate control with the addition of the ER5000




TESCOM 56 Series provides accurate flow control that allows customers to have consistent injection rates over the life of the well.

Applications


- Offshore Chemical Injection

Typical Scaling Application

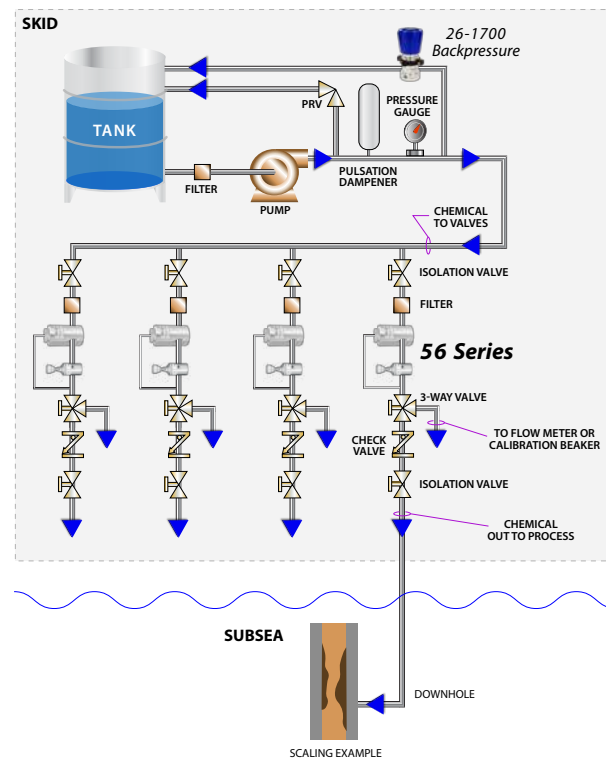


56 Series Regulator Drawing

56-21XX

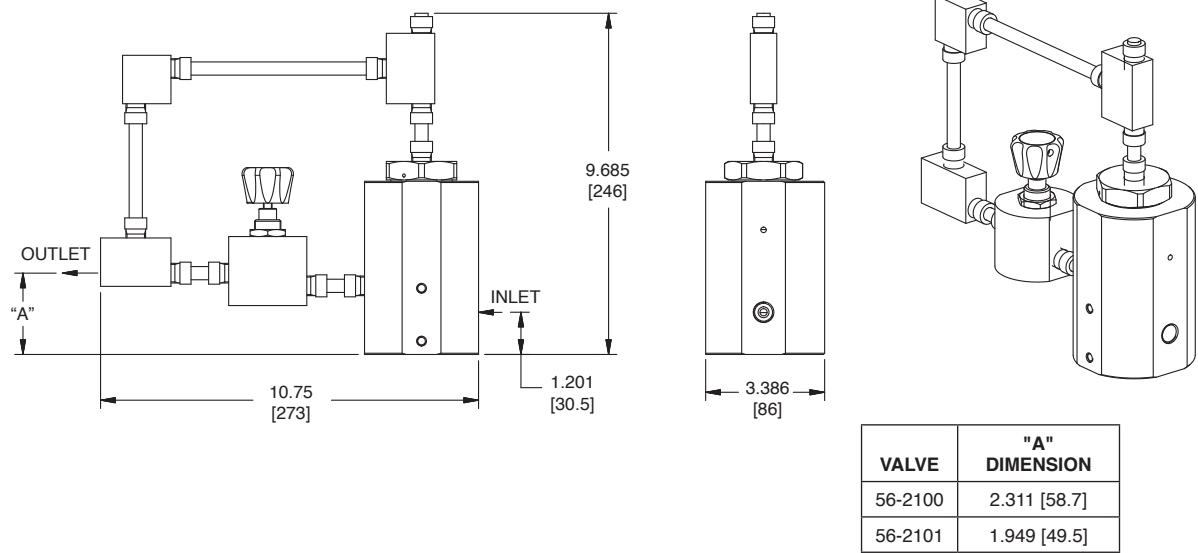

56-22XX

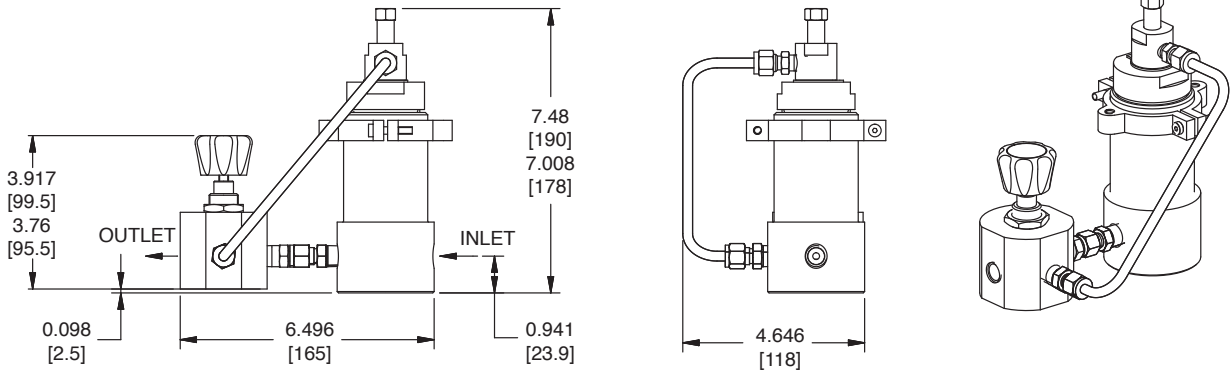

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

56 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

PART NUMBER	MAXIMUM INLET PRESSURE	MAXIMUM OUTLET PRESSURE	MINIMUM DIFFERENTIAL	MAXIMUM DIFFERENTIAL	INLET AND OUTLET PORT SIZE	MINIMUM FLOW RATE	MAXIMUM FLOW RATE
56-2100	15,000 psig 1034 bar	15,000 psig 1034 bar	175 psig 12 bar	12,500 psig 862 bar	3/8"	0.04 gpm 0.1514 l/min	1.20 gpm 4.542 l/min
56-2101	15,000 psig 1034 bar	15,000 psig 1034 bar	175 psig 12 bar	12,000 psig 827 bar	3/8"	0.0004 gpm 0.001514 l/min	0.20 gpm 0.7571 l/min
56-2200	10,000 psig 689 bar	4000 psig 275 bar	175 psig 12 bar	9000 psig 620 bar	1/4"	0.005 gpm 0.01893 l/min	0.16 gpm .6057 l/min
56-2201	10,000 psig 689 bar	4000 psig 275 bar	175 psig 12 bar	9000 psig 620 bar	1/4"	0.1 gpm 0.3785 l/min	2.28 gpm 8.631 l/min

Note: Contact engineering for options for higher flow rates and pressures.



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

D56202089X012 © 2015 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 8/2015.
Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.